


Xbase

		200	400	
Voltage	230V ±10%	120V ±10%	230V ±10%	120V ±10%
Vacuum Control	0AL2106	0AL2107	0AL4104	0AL4107
Wattage	0.14 kW	0.107 kW	0.24 kW	0.255 kW
Frequency	50Hz / 60 Hz	50Hz / 60 Hz	50Hz / 60 Hz	50Hz / 60 Hz
Cabinet height (inc castors)	705 mm	705 mm	705 mm	705 mm
Cabinet width (not inc hose)	707 mm	707 mm	707 mm	707 mm
Cabinet depth (not inc hose)	691 mm	691 mm	691 mm	691 mm
Cabinet weight	80 Kg	80 Kg	80 Kg	80 Kg
Construction	Precision engineered brush	ed stainless steel units. High performa	nce continuous run brushless motors	Mounted on castors for mobility



Labyri	nth Pre-filter
Options: (Pack of 2)	Code:
F8/F9 Composite	202275

4 Main filter
Options: Code:
HEPA/Chemical (std) 110545
HEPA CSA 113585

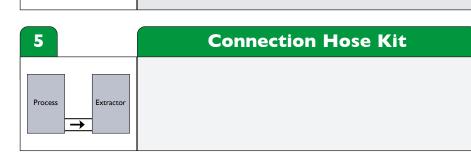

6	Machine I
Your Machine	 Start/Stop Control piece of equipment is s Filter Blocked War equipment to trigger ar Remote ON/OFF S

achine Interfacing (Optional)

Start/Stop Control: Extraction unit starts/stops when a connected piece of equipment is switched ON/OFF.

ter Blocked Warning: A signal is sent to a connected piece of uppment to trigger an alert or to shut it down.

emote ON/OFF Switch: 5M cable & switch

Controls

Visual and Audible Filter Blocked Warning Alerts the operator when a filter starts to block so that a replacement filter can be acquired and downtime can be avoided.

LED Filter Status


Green = Filter OK Yellow = Filter nearly full Red = Filter full, replacement required

Interface with other equipment e.g. a laser optional.

System Features...

- Automatic electronic flow control maintains a constant extraction rate even as the filter blocks
- Adjustable airflow
- VariColour filter blocked warning system
- Low capital and running costs
- Quick change, patented Labyrinth pre-filters deliver longer filter life
- Submicronic (HEPA) filtration removes 99.997% of particles down to 0.3 microns
- Activated carbon filtration removes harmful gas
- Simple to install and quiet in operation
- Easy to relocate
- Precision made from stainless steel





Legend:

- I) Air inlet. 80mm safe seal.
- 2) Pre-filter.
- 3) Main Filter (HEPA location).
- 4) Main Filter (Carbon location).
- 5) Clean air returned to workplace.
- 6) Filter locking handle.
- 7) Filter identification label.

All machines are mounted on four castors for increased mobility.

Includes:

- I x Main filter
- 2 x Labyrinth pre-filters I x Connection Kit
- I x Power cable

Accessories

Please see the accessories section at the back of this brochure.